H2 | W4 | A | VI4

SafeStar 241d



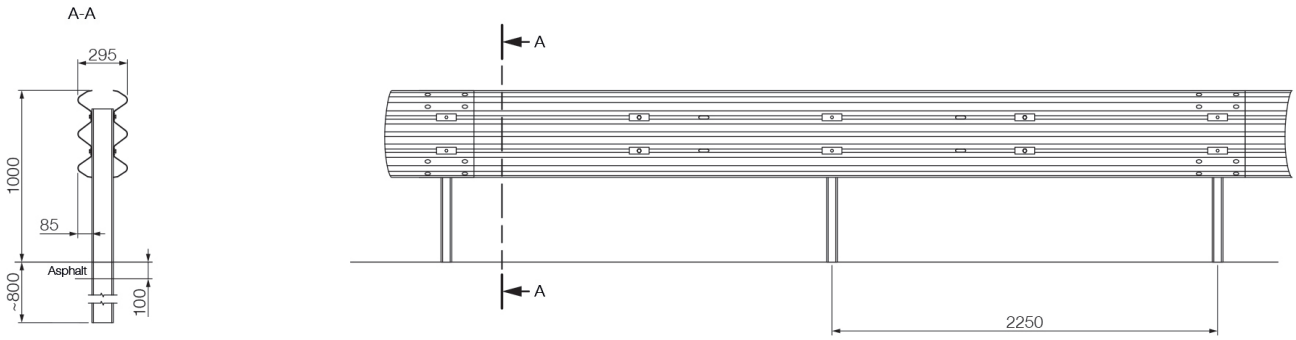

TECHNICAL SPECIFICATIONS

Working width (m) 1.20	Dyn. deflection (m) 1.00	Vehicle intrusion (m) 1.30
Construction width (m) 0.29	Construction height (m) 1.00	Post distance (m) 2.25
Application area driven in asphalt	Type Double	Test length (m) 54.00

© Saferoad RRS GmbH

CE

SAFEROAD®